




# PRESSALIT®

<b>Product</b> <b>Item number</b>	Changing table, 800 x 1400 mm, electrically height adjustable, with sanitary appliances R8782000
<b>Colour</b>	White
<b>Product description</b>	 <p><b>Discontinued per 31 Dec 2015 and replaced by R8682</b></p> <p>Low start height changing table with sanitary appliances, 800 mm x 1400 mm, with electric motor with hand control incl. transformer. Incl. safety stop, integrated sink, tap, shower head, feed/waste system, 2 wire baskets. Height adjustable from 300 mm - 1000 mm. Excl. mounting kit.</p> <p><b>Discontinued per 31 Dec 2015 and replaced by R8682</b></p> <p>Low start height changing table with sanitary appliances, 800 mm x 1400 mm, with electric motor with hand control incl. transformer. Incl. safety stop, integrated sink, tap, shower head, feed/waste system, 2 wire baskets. Height adjustable from 300 mm - 1000 mm. Excl. mounting kit.</p>
<b>Adjustability</b>	Height adjustable
<b>Product capacity</b>	Max load: 75 kg.
<b>Speed upwards</b>	Speed up mm: 38 mm/s Speed down mm: 38 mm/s
<b>Noise level</b>	48 dB
<b>Materials</b>	Lifting unit and baskets: Powder-laquered steel. Worktop: ABS with acrylic.
<b>Ergonomy</b>	The smooth height adjustment ensures that it is always possible to set the table at an ergonomically correct height. The table descends to a very low position, which offers the advantage that toddlers can easily climb up and down themselves. Thereby unnecessary lifting is avoided.
<b>Features</b>	Easy-to-clean surfaces ensure optimum hygiene. Integrated sink and tap with pull-out spout. Integrated safety system prevents entrapment.

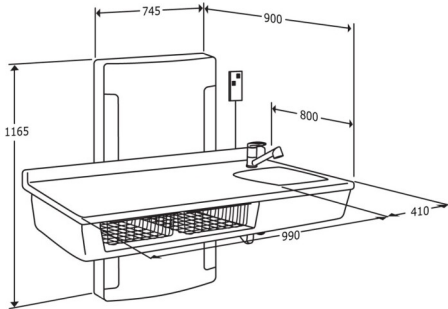

# PRESSALIT®

<b>Product</b>	Changing table, 800 x 1400 mm, electrically height adjustable, with sanitary appliances
<b>Item number</b>	R8782000
<b>Mains connection (V)</b>	230
<b>Actuator (motor)</b>	LA31 Deskline (Linak), 2500N, IPX1
<b>Control box</b>	CBD6 (Linak), IP22
<b>Wired remote control</b>	HB3 (Linak), IP66
<b>Power consumption (maximum load)</b>	Power consumption by maximum load, watt: 96 W Power consumption by standby: 0,1 W
<b>Cleaning</b>	The product is to be cleaned with hot water or a mild soapy cleaning agent. Do not use chlorine based or corrosive cleaners as it may result in the surface being damaged.

[pressalit.com](http://pressalit.com)

Pressalit A/S  
Pressalitvej 1  
DK-8680 Ry  
Tel.: +45 8788 8788  
Fax: +45 8788 8789  
E-mail: [pressalit@pressalit.com](mailto:pressalit@pressalit.com)

## PRESSALIT®